

# BLAST ALL Inc.

Industrial Coating • Structural Maintenance • Abrasive Blasting



**TOWN OF LEE, EMERGENCY REPAIR OF BRIDGE L-05-044 VARIOUS LOCATIONS, 607545-92992**

## **961.60 Surface Precleaning**

- Methods and equipment to be used for precleaning (power washing)
  - See attached data sheet for Pressure-Pro 6115 pressure washer for precleaning.
  - Bio degradable Simple Green cleaning solution will be used for precleaning.

Pressure washing is required for all surfaces of the structure that are to be painted. Prior to pressure washing, BAI shall remove all accumulated debris from abutments, pier caps, girder flanges and other areas of collection. Debris may include but are not limited to, sand, gravel, bituminous materials and bird droppings. The method of removal shall allow for the collection and proper disposal of the debris.

148 Mill Rock Road East • P.O. Box 775 • Old Saybrook, CT 06475 • Tel (860) 388-5464 / Fax (860) 388-4644

**TECHNICAL DATA SHEET**

Date: January 2009

**PRODUCT:** SIMPLE GREEN® ALL-PURPOSE CLEANER/DEGREASER/DEODORIZER**MANUFACTURER:** Sunshine Makers, Inc. 15922 Pacific Coast Highway, Huntington Harbour, CA 92649**USE OF PRODUCT:** An all purpose cleaner and degreaser used diluted in water for direct, spray, and dip tank procedures.**TYPICAL DILUTIONS:** (ratio = Part Simple Green to Part Water)


Full Strength to 1:5 = Heavy cleaning/degreasing and parts washer or dip tank fluid.

1:10 = Moderate cleaning.

1:30 = Light cleaning or moderate cleaning with pressure sprayer/steam cleaner.

1:50 = Light cleaning or light cleaning with pressure sprayer/steam cleaner.

1:150 = Cleaning of glass, chrome, reflective surfaces.

**NFPA/HMIS Rating**

Health = 1 (slight)

Reactivity = 0 (minimal)

Fire = 0 (minimal)

Special = 0 (minimal)

**PHYSICAL & CHEMICAL PROPERTIES:****Detection:** Translucent green liquid with characteristic sassafras odor.**Specific Gravity:** 1.0257**pH of Concentrate:** 9.5**Evaporation:** > 1 (butyl acetate = 1)**Boiling Point:** > 110°C (231°F)**Freezing Point:** -9 °C (16 °F)**VOC Composite Partial Pressure:** 0.006 mm Hg @ 20°C**Volatile Organic Compounds:** <40 g/L per EPA Method 24.**Ash Content:** At 600°F: 1.86% by weight**Nutrient Content:** Nitrogen: < 1.0% by weight (fusion and qualitative test for ammonia)

Phosphorus: 0.3% by formula.

Sulfur: 0.6% by weight (barium chloride precipitation method)

**Water Solubility:** Completely soluble in water.**Biodegradability:** Simple Green is readily decomposed by naturally occurring microorganisms. The biological oxygen demand (BOD), as a percentage of the chemical oxygen demand (COD), after 4, 7, and 11 days was 56%, 60%, and 70%, respectively. Per OECD Closed Bottle Test, Simple Green meets OECD and EPA recommendations for ready biodegradability.**Disposal:** Dispose of in accordance with all regulations governing your location.**Shelf Life:** In unopened containers, the shelf-life for this product is indefinite. If frozen, the product will reconstitute without loss of efficacy when brought back to room temperature and agitated. Storage or exposure to temperatures above 100°F for more than twenty-four hours may cause surfactants to break down and a resulting loss of efficacy. Once containers are open, uncontaminated product life should be greater than 5 years to indefinite. However, length of shelf-life cannot be guaranteed due to variety of contaminants possibly entering the fluid and their effect upon spoilage rates.**Stability, Reactivity / Storage & Handling:**

Simple Green is stable, not flammable, and will not burn.

Simple Green is non-reactive and stable, even under fire conditions, and will not react with water or oxidizers. Hazardous polymerization will not occur.

No special precautions are required. This product is non-hazardous for storage and transport according to the U.S. Department of Transportation Regulations. Simple Green requires no special labeling or placarding to meet U.S. Department of Transportation requirements.

Dangerous Goods Class: Non-hazardous.

UN Number: Not required

**Containers:** Packaged in PET (spray bottles) or HDPE (gallon bottles and larger.) Simple Green residues can be completely removed by rinsing with water; the container can be recycled or applied to other non-food or non-potable uses.**Technical Questions: Sunshine Makers, Inc. Technical Department**

Phone: 800/228-0709 Mon-Fri, 8am-5pm Pacific Daylight Standard Time (USA)

Email: [Infoweb@simplegreen.com](mailto:Infoweb@simplegreen.com)

**Pressure-Pro Inc.**  
**7300 Commercial Circle**  
**Fort Pierce FL 34951**

April 12, 2012

To whom it may concern ;

Hot water pressure washer :

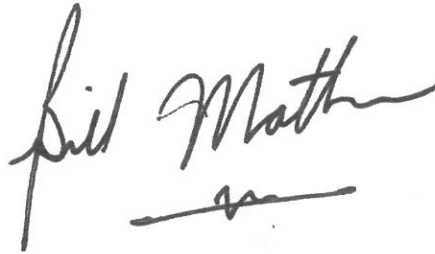
Model # 6115PROM-30HG      Serial # 12-03864

Was tested at the Pressure Pro factory April 12, 2012  
At the following specifications.

6.2 Gallons per minute (# 7 Pressure nozzle)  
205 Degree discharge temperature (135 Degree rise)  
3100 PSI ( Pounds per square inch)

These specifications are recorded in the test records at Pressure-Pro.

Thank You,

A handwritten signature in black ink that reads "Bill Mathews". The signature is written in a cursive style with a horizontal line underneath the name.

Engineering Department  
Bill Mathews  
Pressure Pro Inc.  
7300 Commercial Circle  
Fort Pierce Florida 34951  
(772) 461-4486 Main  
(772) 672-3698 Direct  
E-mail [bill@pressure-pro.com](mailto:bill@pressure-pro.com)

[Click [here](#) and type your name]  
[Click [here](#) and type job title]